
제품 기술 사양

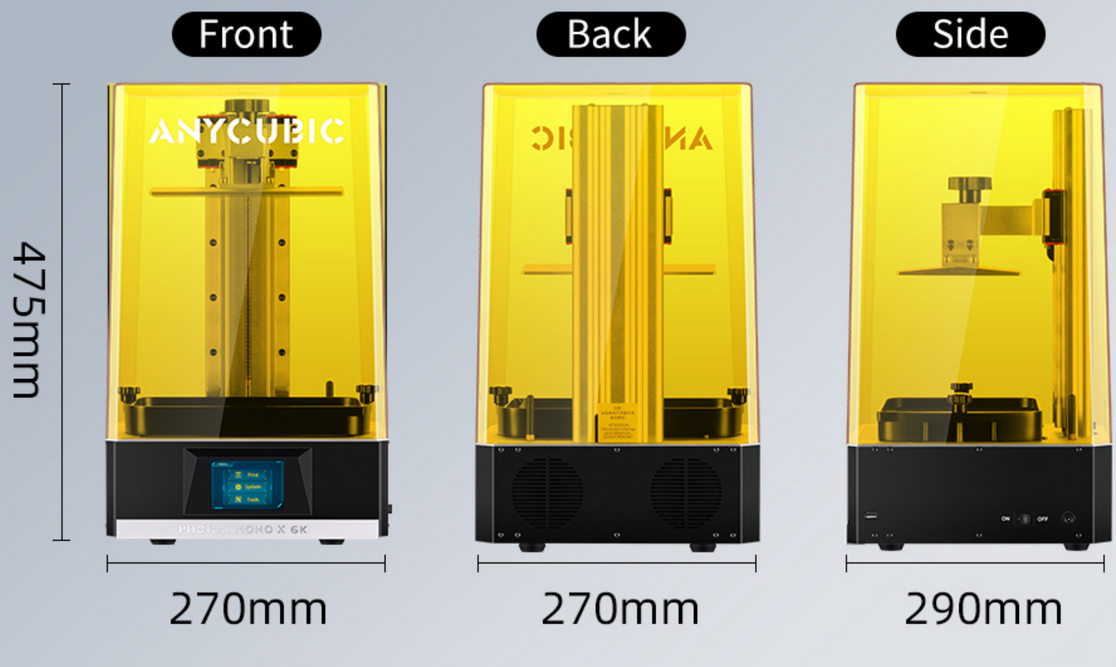

출력

System :	ANYCUBIC Photon Mono X 6K
Operation :	3.5 inch Touch Screen
Software :	ANYCUBIC Photon workshop
Connectivity :	USB, Wifi


출력 사양

Technology:	LCD-based SLA
Light-source:	high-quality filament（wavelength 405nm）
XY Res.:	5,760 x 3,600 px（6K）
Z Axis Res.:	0.01mm
Layer Res.:	0.01 ~ 0.15mm
Printing Speed:	MAX 80mm/h
Rated Power:	120W

물리적 치수

Printer Size :	270mm(L)*290mm(W)*475mm(H)
Build Volume:	197mm(L)*122mm(W)*245mm(H)
Package Size:	375mm(L)*395mm(W)*600mm(H)
Material:	405nm UV Resin
Net Weight:	~11kg
Gross Weight:	~14kg

제품 사양

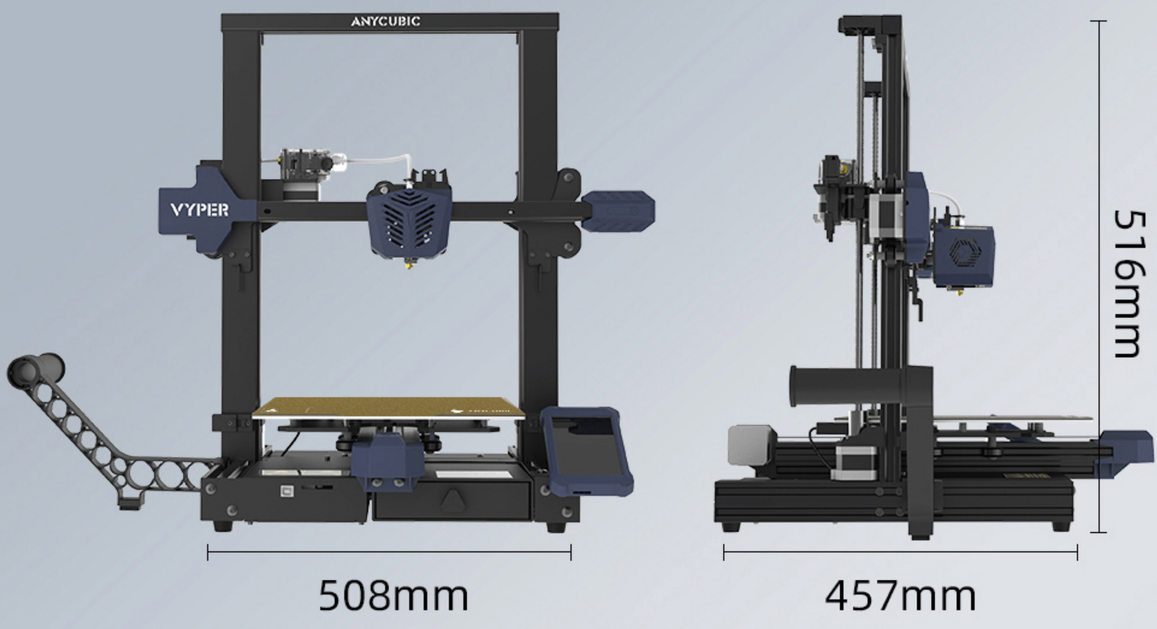

출력 사양

출력 기술 :
FDM (융합 증착 모델링)

출력 용량 :
245 mm(L) X 245(W) X 260 mm(H)

출력 해상도 :
±0.1 mm

위치 정확도 :
X/Y 0.0125 mm, Z 0.002 mm

익스트루더 수 :
싱글

노즐 지름 :
0.4 mm

출력 속도 :
<180 mm/s (80-100mm/s를 권장)

지원가능한 필라멘트 :
PLA, TPU, ABS, PETG, Wood

본체 사양

본체 크기 :
508 mm X 457 mm X 516 mm

본체 무게 :
-10 Kg

소프트웨어 사양

슬라이싱 소프트웨어 :
Cura

입력 형식 :
.STL, .OBJ, .AMF

출력 형식 :
GCODE

연결 모드 :
Trans-flash Card; USB cable

전원 사양

입력 전압 :
100V/220V AC, 50/60Hz

출력 전압 :
24V/14.6A (350W)

온도 사양

주변 작동 온도 :
8 °C - 40 °C

작동 노즐 온도 :
max ≤ 260 °C

작동 베드 온도 :
max ≤ 110 °C

제품 스펙

정면



290mm

479mm

뒷면



290mm

측면



270mm

제품 스펙

제품 기능	Wash and Cure
조절 방법	Digital tube, LED indicator, Control knob
정격 전력	25W
입력 전압	AC110/240V 50/60Hz
UV lights	405nm
시간 선택	Washing 2-60min (2min adjustable)
	Curing 1-60min (1min adjustable)
제품 크기	290mm(L)*270mm(W)*479mm(H)
세척 크기	192mm(L)*120mm(W)*290mm(H)
	192mm(L)*120mm(W)*235mm(H)
경화 크기	190mm(D)*245mm(H)
무게	~6.5kg